95.P5

See page 12

Module	Socket	Relay	Description	Mounting	Accessories
99.02	**95.P3**	40.31	**Push-in terminal sockets** - For fast cable connection - Top terminals - Contacts - Bottom terminals - Coil	Panel or 35 mm rail (EN 60715) mount	- Coil indication and EMC suppression modules - Jumper link - Timer modules - Plastic retaining and release clip
	95.P5	40.51 40.52 40.61 40.62			



95.05

See page 14

Module	Socket	Relay	Description	Mounting	Accessories
99.02	**95.03**	40.31	**Box clamp socket** - Top terminals - Contacts - Bottom terminals - Coil	Panel or 35 mm rail (EN 60715) mount	- Coil indication and EMC suppression modules - Jumper link - Timer modules - Plastic retaining and release clip
	95.05	40.51 40.52 40.61 40.62			



95.85.3

See page 15

Module	Socket	Relay	Description	Mounting	Accessories
99.80	**95.83.3**	40.31	**Box clamp socket** - Top terminals - NO and COM Contacts - Bottom terminals - Coil and NC Contacts	Panel or 35 mm rail (EN 60715) mount	- Coil indication and EMC suppression modules - Jumper link - Plastic retaining and release clip
	95.85.3	40.51 40.52 40.61 40.62			

95.95.3

See page 16

Module	Socket	Relay	Description	Mounting	Accessories
99.80	**95.93.3**	40.31	**Box clamp socket** - Top terminals - Contacts - Bottom terminals - Coil	Panel or 35 mm rail (EN 60715) mount	- Coil indication and EMC suppression modules - Jumper link - Plastic retaining and release clip
	95.95.3	40.51 40.52 40.61 40.62			

95.65

See page 17

Module	Socket	Relay	Description	Mounting	Accessories
99.01	**95.63**	40.31	**Box clamp socket** - Top terminals - Contacts - Bottom terminals - Coil	Panel or 35 mm rail (EN 60715) mount	- Metal retaining clip
	95.65	40.51 40.52 40.61 40.62			

95.13.2

See page 18

Module	Socket	Relay	Description	Mounting	Accessories
—	**95.13.2**	40.31	**PCB socket**	PCB mounting	- Metal retaining clip - Plastic retaining clip
—	**95.15.2**	40.51 40.52 40.61 40.62			

95 SERIES
Socket and accessories for 40 series relays



95.P5
Approvals
(according to type):

095.91.3



060.48

Push-in terminals socket panel or 35 mm rail mount		**95.P3**	**95.P5**
For relay type		40.31	40.51, 40.52, 40.61, 40.62
Accessories			
Metal retaining clip		095.71	
Plastic retaining and release clip (supplied with socket - packaging code SPA)		095.91.3	
8-way jumper link		097.58	
2-way jumper link (12.5 mm pitch)		097.52	
2-way jumper link (4.6 mm pitch)		097.42	
Marker tag holder (for tags 060.48 type)		097.00	
Identification tag		095.00.4	
Modules (see table below)		99.02	
Timer modules (see table below)		86.30	
Sheet of marker tags for plastic retaining and release clip 095.91.3 and for marker tag holder 097.00, 48 tags, 6 x 12 mm, for CEMBRE thermal transfert printer		060.48	
Technical data			
Rated values		10 A - 250 V*	
Dielectric strength between coil and contacts (1.2/50 µs)		6 kV	
Protection category		IP 20	
Ambient temperature	°C	–40…+70 (see diagram L95)	
Wire strip length	mm	10	
Min. wire size for 95.P3 and 95.P5 sockets		solid wire	stranded wire
	mm²	0.5	0.5
	AWG	21	21
Max. wire size for 95.P3 and 95.P5 sockets		solid wire	stranded wire
	mm²	2 x 1.5 / 1 x 2.5	2 x 1.5 / 1 x 2.5
	AWG	2 x 16 / 1 x 14	2 x 16 / 1 x 14

* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).
With the relay 40.51 the change-over contact will be 21-12-14.

L 95 - Total socket current v ambient temperature

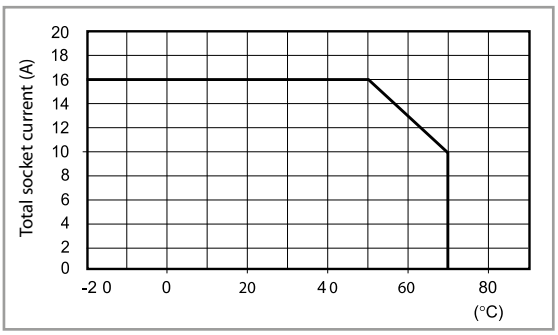

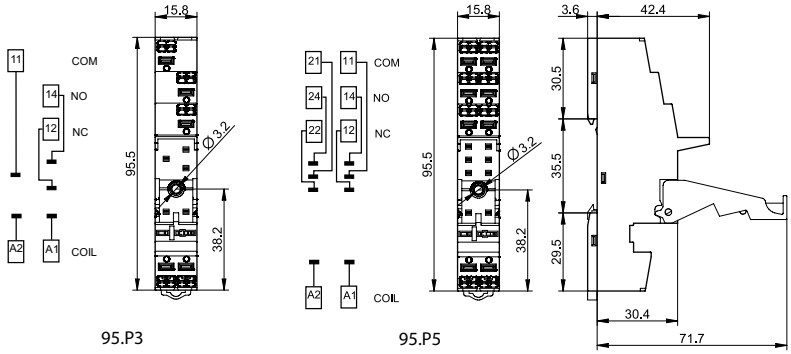



097.58

8-way jumper link for 95.P3 and 95.P5 sockets	097.58
Rated values	10 A - 250 V

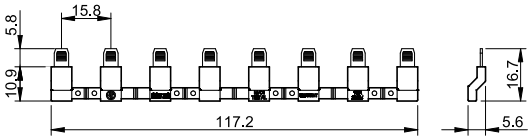

097.52

2-way jumper link for 95.P3 and 95.P5 sockets	097.52
Rated values	10 A - 250 V



XII-2025, www.findernet.com

097.42

2-way jumper link for 95.P3 and 95.P5 sockets	097.42
Rated values	10 A - 250 V



097.00

Marker tag holder for 95.P3 and 95.P5 sockets	097.00



86.30

86 series timer modules	
(12…24)V AC/DC; Bi-function: AI, DI; (0.05 s…100 h)	86.30.0.024.0000
(110…125)V AC; Bi-function: AI, DI; (0.05 s…100 h)	86.30.8.120.0000
(230…240)V AC; Bi-function: AI, DI; (0.05 s…100 h)	86.30.8.240.0000

Approvals (according to type):

99.02

Approvals (according to type):

DC Modules with non-standard polarity (+A2) on request.

99.02 coil indication and EMC suppression modules for 95.P3 and 95.P5 sockets		
Diode (+A1, standard polarity)	(6…220)V DC	99.02.3.000.00
LED	(6…24)V DC/AC	99.02.0.024.59
LED	(28…60)V DC/AC	99.02.0.060.59
LED	(110…240)V DC/AC	99.02.0.230.59
LED + Diode (+A1, standard polarity)	(6…24)V DC	99.02.9.024.99
LED + Diode (+A1, standard polarity)	(28…60)V DC	99.02.9.060.99
LED + Diode (+A1, standard polarity)	(110…220)V DC	99.02.9.220.99
LED + Varistor	(6…24)V DC/AC	99.02.0.024.98
LED + Varistor	(28…60)V DC/AC	99.02.0.060.98
LED + Varistor	(110…240)V DC/AC	99.02.0.230.98
RC circuit	(6…24)V DC/AC	99.02.0.024.09
RC circuit	(28…60)V DC/AC	99.02.0.060.09
RC circuit	(110…240)V DC/AC	99.02.0.230.09
Residual current by-pass*	(110…240)V AC	99.02.8.230.07

* Additional 0.9 W power dissipation

95 SERIES
Socket and accessories for 40 series relays



95.05

Approvals (according to type):

Certain relay/socket combinations

095.01



060.48

Box clamp socket panel or 35 mm rail mount		**95.03 (blue)**	**95.03.0 (black)**	**95.05 (blue)**	**95.05.0 (black)**
For relay type		40.31		40.51, 40.52, 40.61, 40.62	
Accessories					
Metal retaining clip		095.71			
Plastic retaining and release clip (supplied with socket - packaging code SPA)		095.01	095.01.0	095.01	095.01.0
8-way jumper link		095.18	095.18.0	095.18	095.18.0
Marker tag holder (for tags 060.48 type)		097.00			
Identification tag		095.00.4			
Modules (see table below)		99.02			
Timer modules (see table below)		86.30			
Sheet of marker tags for plastic retaining and release clip 095.01 and for marker tag holder 097.00, 48 tags, 6 x 12 mm, for CEMBRE thermal transfer printers		060.48			
Technical data					
Rated values		10 A - 250 V*			
Dielectric strength between coil and contacts (1.2/50 µs)		6 kV			
Protection category		IP 20			
Ambient temperature	°C	–40…+70 (see diagram L95)			
Screw torque	Nm	0.5			
Wire strip length	mm	8			
Max. wire size for 95.03 and 95.05 sockets		solid wire		stranded wire	
	mm²	1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5	
	AWG	1 x 10 / 2 x 14		1 x 12 / 2 x 14	

* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).
With the relay 40.51 the change-over contact will be 21-12-14.

L 95 - Total socket current v ambient temperature

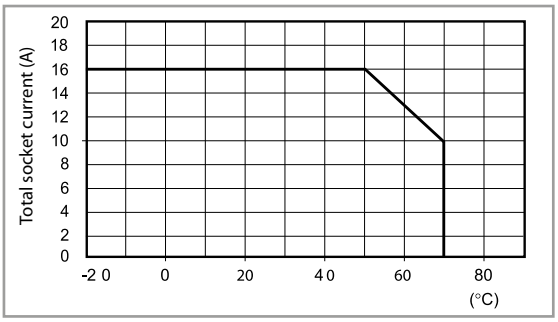



95.03



95.05





095.18

8-way jumper link for 95.03 and 95.05 sockets	095.18 (blue)	095.18.0 (black)
Rated values	10 A - 250 V	



86.30

86 series timer modules	
(12…24)V AC/DC; Bi-function: AI, DI; (0.05 s…100 h)	86.30.0.024.0000
(110…125)V AC; Bi-function: AI, DI; (0.05 s…100 h)	86.30.8.120.0000
(230…240)V AC; Bi-function: AI, DI; (0.05 s…100 h)	86.30.8.240.0000

Approvals (according to type):

99.02

Approvals (according to type):

DC Modules with non-standard polarity (+A2) on request.

99.02 coil indication and EMC suppression modules for 95.03 and 95.05 sockets		
Diode (+A1, standard polarity)	(6…220)V DC	99.02.3.000.00
LED	(6…24)V DC/AC	99.02.0.024.59
LED	(28…60)V DC/AC	99.02.0.060.59
LED	(110…240)V DC/AC	99.02.0.230.59
LED + Diode (+A1, standard polarity)	(6…24)V DC	99.02.9.024.99
LED + Diode (+A1, standard polarity)	(28…60)V DC	99.02.9.060.99
LED + Diode (+A1, standard polarity)	(110…220)V DC	99.02.9.220.99
LED + Varistor	(6…24)V DC/AC	99.02.0.024.98
LED + Varistor	(28…60)V DC/AC	99.02.0.060.98
LED + Varistor	(110…240)V DC/AC	99.02.0.230.98
RC circuit	(6…24)V DC/AC	99.02.0.024.09
RC circuit	(28…60)V DC/AC	99.02.0.060.09
RC circuit	(110…240)V DC/AC	99.02.0.230.09
Residual current by-pass*	(110…240)V AC	99.02.8.230.07

* Additional 0.9 W power dissipation

XII-2025, www.findernet.com



95.85.3

Approvals (according to type):

095.91.3



060.48

Box clamp socket panel or 35 mm rail mount		**95.83.3 (blue)**	**95.83.30 (black)**	**95.85.3 (blue)**	**95.85.30 (black)**
For relay type		40.31		40.51, 40.52, 40.61, 40.62	
Accessories					
Metal retaining clip		095.71			
Plastic retaining and release clip (supplied with socket - packaging code SPA)		095.91.3	095.91.30	095.91.3	095.91.30
8-way jumper link		095.08	095.08.0	095.08	095.08.0
Identification tag		095.00.4			
Modules (see table below)		99.80			
Marker tag holder		097.00			
Sheet of marker tags for plastic retaining and release clip 095.91.3, 48 tags, 6 x 12 mm, for CEMBRE thermal transfert printer		060.48			
Technical data					
Rated values		10 A - 250 V*			
Dielectric strength between coil and contacts (1.2/50 µs)		6 kV		2 kV	
Protection category		IP 20			
Ambient temperature	°C	–40…+70 (see diagram L95)			
Screw torque	Nm	0.5			
Wire strip length	mm	7			
Max. wire size for 95.83.3 and 95.85.3 sockets		solid wire		stranded wire	
	mm²	1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5	
	AWG	1 x 10 / 2 x 14		1 x 12 / 2 x 14	

* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).
With the relay 40.51 the change-over contact will be 21-12-14.

L 95 - Total socket current v ambient temperature

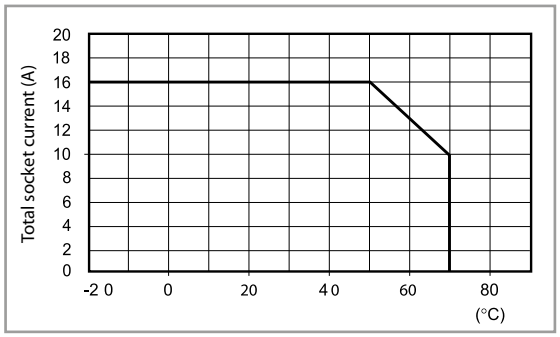

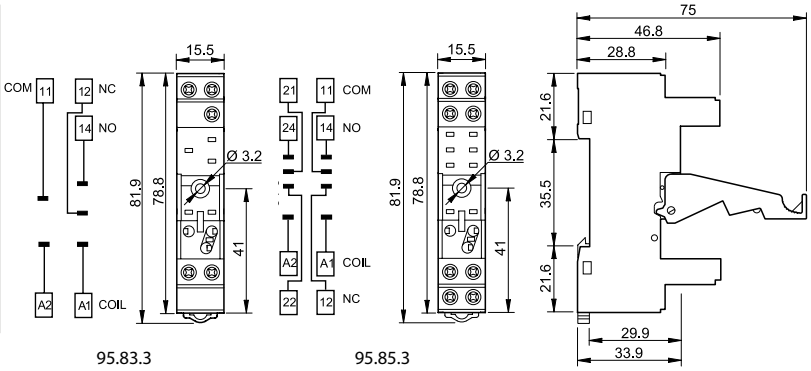

95.83.3 95.85.3



095.08

8-way jumper link for 95.83.3 and 95.85.3 sockets	095.08 (blue)	095.08.0 (black)
Rated values	10 A - 250 V	

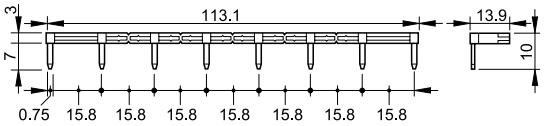

99.80

Approvals (according to type):

99.80 coil indication and EMC suppression modules for 95.83.3 and 95.85.3 sockets		
		Blue*
Diode (+A1, standard polarity)	(6…220)V DC	99.80.3.000.00
LED	(6…24)V DC/AC	99.80.0.024.59
LED	(28…60)V DC/AC	99.80.0.060.59
LED	(110…240)V DC/AC	99.80.0.230.59
LED + Diode (+A1, standard polarity)	(6…24)V DC	99.80.9.024.99
LED + Diode (+A1, standard polarity)	(28…60)V DC	99.80.9.060.99
LED + Diode (+A1, standard polarity)	(110…220)V DC	99.80.9.220.99
LED + Varistor	(6…24)V DC/AC	99.80.0.024.98
LED + Varistor	(28…60)V DC/AC	99.80.0.060.98
LED + Varistor	(110…240)V DC/AC	99.80.0.230.98
RC circuit	(6…24)V DC/AC	99.80.0.024.09
RC circuit	(28…60)V DC/AC	99.80.0.060.09
RC circuit	(110…240)V DC/AC	99.80.0.230.09
Residual current by-pass*	(110…240)V AC	99.80.8.230.07

* Additional 0.9 W power dissipation

* Modules in Black housing are available on request.

Green LED is standard. Red LED available on request.

A



95.95.3

Approvals (according to type):

095.91.3



060.48

Screw (Box clamp) terminal socket panel or 35 mm rail mount		**95.93.3 (blue)**	**95.93.30 (black)**	**95.95.3 (blue)**	**95.95.30 (black)**
For relay type		40.31		40.51, 40.52, 40.61, 40.62	
Accessories					
Metal retaining clip		095.71			
Plastic retaining and release clip (supplied with socket - packaging code SPA)		095.91.3	095.91.30	095.91.3	095.91.30
8-way jumper link		095.08	095.08.0	095.08	095.08.0
Identification tag		095.00.4			
Modules (see table below)		99.80			
Sheet of marker tags for plastic retaining and release clip 095.91.3 and for marker tag holder 097.00, 48 tags, 6 x 12 mm, for CEMBRE thermal transfer printers		060.48			
Technical data					
Rated values		10 A - 250 V*			
Dielectric strength between coil and contacts (1.2/50 µs)		6 kV			
Protection category		IP 20			
Ambient temperature	°C	–40…+70 (see diagram L95)			
Screw torque	Nm	0.5			
Wire strip length	mm	8			
Max. wire size for 95.93.3 and 95.95.3 sockets		solid wire		stranded wire	
	mm^2	1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5	
	AWG	1 x 10 / 2 x 14		1 x 12 / 2 x 14	

* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12). With the relay 40.51 the change-over contact will be 21-12-14.

L 95 - Total socket current v ambient temperature

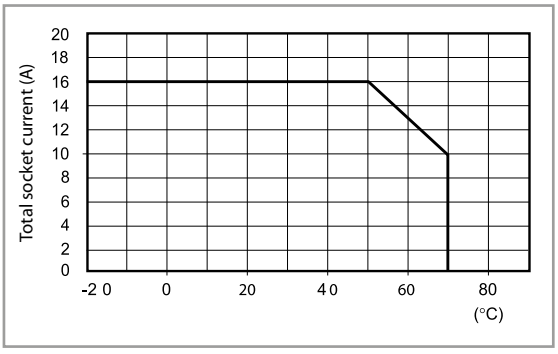

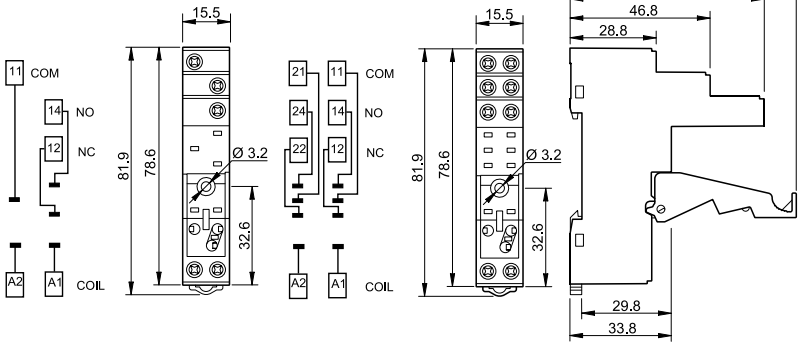

95.93.3 95.95.3

8-way jumper link for 95.93.3 and 95.95.3 sockets	095.08 (blue)	095.08.0 (black)
Rated values	10 A - 250 V	



095.08

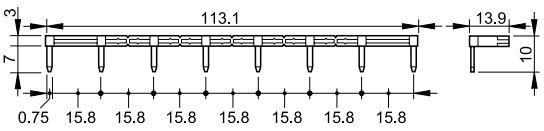

99.80 coil indication and EMC suppression modules for 95.93.3 and 95.95.3 sockets		
		Blue*
Diode (+A1, standard polarity)	(6…220)V DC	99.80.3.000.00
LED	(6…24)V DC/AC	99.80.0.024.59
LED	(28…60)V DC/AC	99.80.0.060.59
LED	(110…240)V DC/AC	99.80.0.230.59
LED + Diode (+A1, standard polarity)	(6…24)V DC	99.80.9.024.99
LED + Diode (+A1, standard polarity)	(28…60)V DC	99.80.9.060.99
LED + Diode (+A1, standard polarity)	(110…220)V DC	99.80.9.220.99
LED + Varistor	(6…24)V DC/AC	99.80.0.024.98
LED + Varistor	(28…60)V DC/AC	99.80.0.060.98
LED + Varistor	(110…240)V DC/AC	99.80.0.230.98
RC circuit	(6…24)V DC/AC	99.80.0.024.09
RC circuit	(28…60)V DC/AC	99.80.0.060.09
RC circuit	(110…240)V DC/AC	99.80.0.230.09
Residual current by-pass*	(110…240)V AC	99.80.8.230.07

* Additional 0.9 W power dissipation

99.80

Approvals (according to type):

* Modules in Black housing are available on request.

Green LED is standard. Red LED available on request.

XII-2025, www.findernet.com



95.63

Approvals (according to type):

95.65

Approvals (according to type):

Box clamp socket panel or 35 mm rail mount		**95.63**	**95.65**
For relay type		40.31	40.51, 40.52, 40.61, 40.62
Accessories			
Metal retaining clip		095.71	
8-way jumper link		095.08	095.08
Modules (see table below)		99.01	—
Technical data			
Rated values		10 A - 250 V*	
Dielectric strength between coil and contacts (1.2/50 µs)		6 kV	2 kV
Protection category		IP 20	
Ambient temperature	°C	–40…+70 (see diagram L95)	
Screw torque	Nm	0.5	
Wire strip length	mm	7	
Max. wire size for 95.63 and 95.65 sockets		solid wire	stranded wire
	mm²	1 x 6 / 2 x 2.5	1 x 4 / 2 x 2.5
	AWG	1 x 10 / 2 x 14	1 x 12 / 2 x 14

* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).
With the relay 40.51 the change-over contact will be 21-12-14.

L 95 - Total socket current v ambient temperature

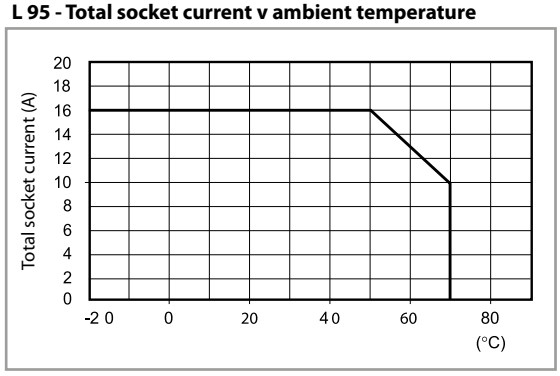

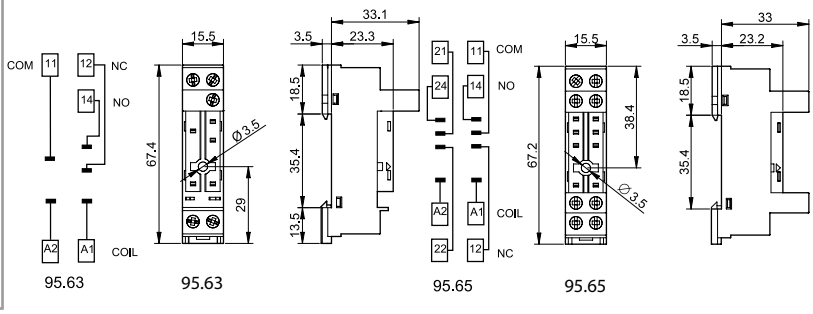



095.08

8-way jumper link for 95.63 and 95.65 sockets	095.08 (blue)
Rated values	10 A - 250 V

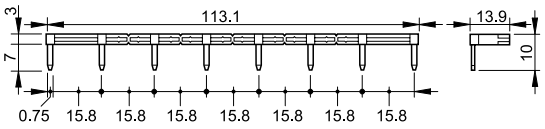

99.01

Approvals (according to type):

99.01 coil indication and EMC suppression modules for type 95.63 socket		
		Blue*
Diode (+A1, standard polarity)	(6…220)V DC	99.01.3.000.00
Diode (+A2, non-standard polarity)	(6…220)V DC	99.01.2.000.00
LED	(6…24)V DC/AC	99.01.0.024.59
LED	(28…60)V DC/AC	99.01.0.060.59
LED	(110…240)V DC/AC	99.01.0.230.59
LED + Diode (+A1, standard polarity)	(6…24)V DC	99.01.9.024.99
LED + Diode (+A1, standard polarity)	(28…60)V DC	99.01.9.060.99
LED + Diode (+A1, standard polarity)	(110…220)V DC	99.01.9.220.99
LED + Diode (+A2, non-standard polarity)	(6…24)V DC	99.01.9.024.79
LED + Diode (+A2, non-standard polarity)	(28…60)V DC	99.01.9.060.79
LED + Diode (+A2, non-standard polarity)	(110…220)V DC	99.01.9.220.79
LED + Varistor	(6…24)V DC/AC	99.01.0.024.98
LED + Varistor	(28…60)V DC/AC	99.01.0.060.98
LED + Varistor	(110…240)V DC/AC	99.01.0.230.98
RC circuit	(6…24)V DC/AC	99.01.0.024.09
RC circuit	(28…60)V DC/AC	99.01.0.060.09
RC circuit	(110…240)V DC/AC	99.01.0.230.09
Residual current by-pass*	(110…240)V AC	99.01.8.230.07

* Additional 0.9 W power dissipation

* Modules in Black housing are available on request.

Green LED is standard. Red LED available on request.

A

95.13.2

95.15.2

Approvals (according to type):

PCB socket	95.13.2 (blue)	95.13.20 (black)	95.15.2 (blue)	95.15.20 (black)
For relay type	40.31		40.51, 40.52, 40.61, 40.62	
Accessories				
Metal retaining clip (supplied with socket - packaging code SMA)	095.51			
Plastic retaining clip	095.52			
Technical data				
Rated values	12 A - 250 V		10 A - 250 V*	
Dielectric strength between coil and contacts (1.2/50 µs)	6 kV			
Protection category	IP 20			
Ambient temperature °C	–40…+70			

* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12). With the relay 40.51 the change-over contact will be 21-12-14.

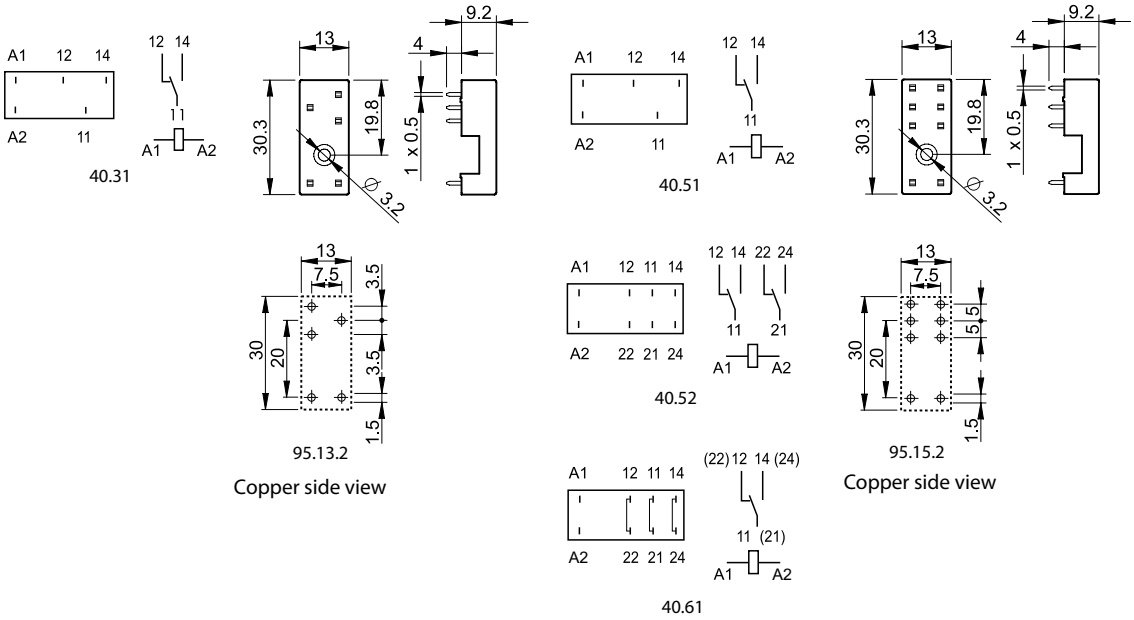

Packaging codes

How to code and identify retaining clip and packaging options for sockets.

Example:

9 5 . P 5 S P A

A Standard packaging

SM Metal retaining clip
SP Plastic retaining clip

Please see general technical information

XII-2025, www.findernet.com